




Actuator Robstride 04

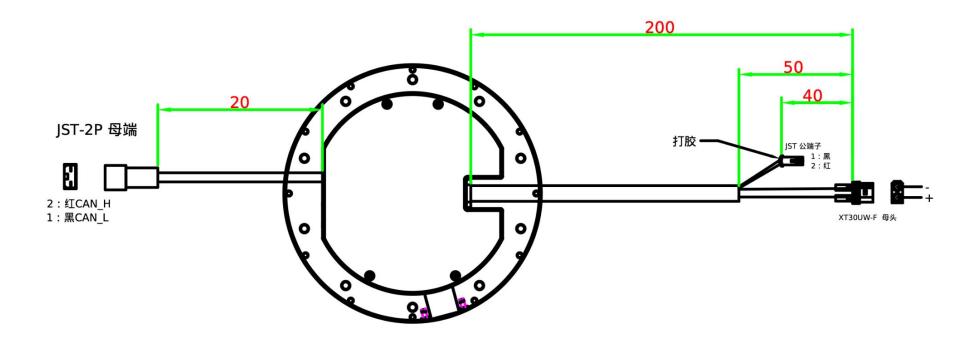

Actuator Robstride 03

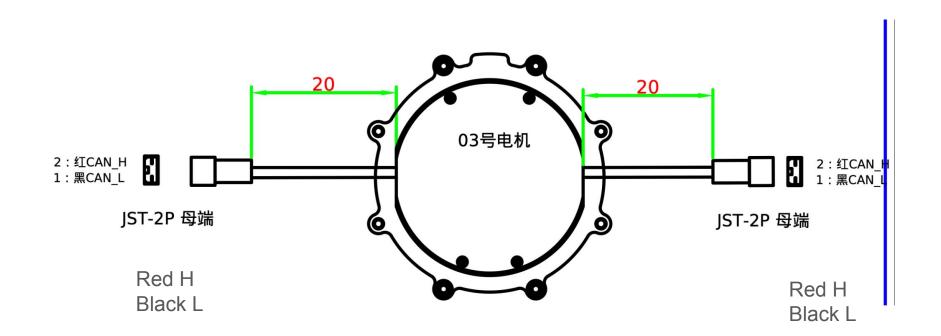


Power board to 21 / 11

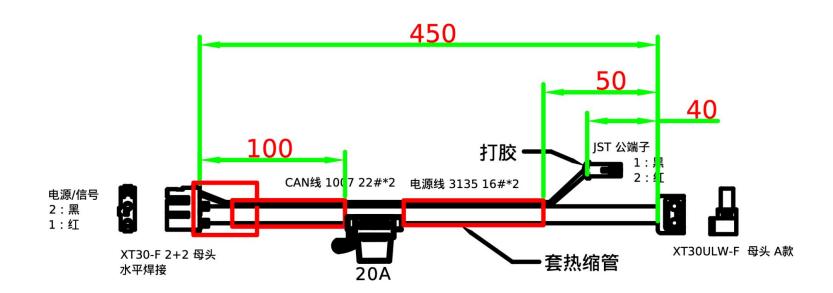

21 to 22 / 11 to 12






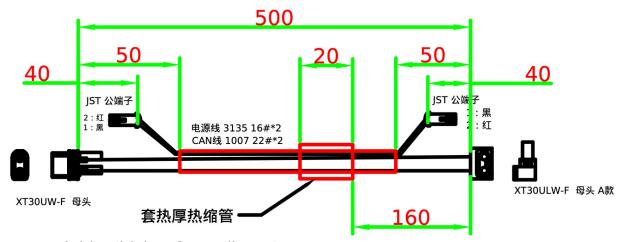

Add a thicker 8mm diameter section for friction strain relief


22 to 23 / 12 to 13

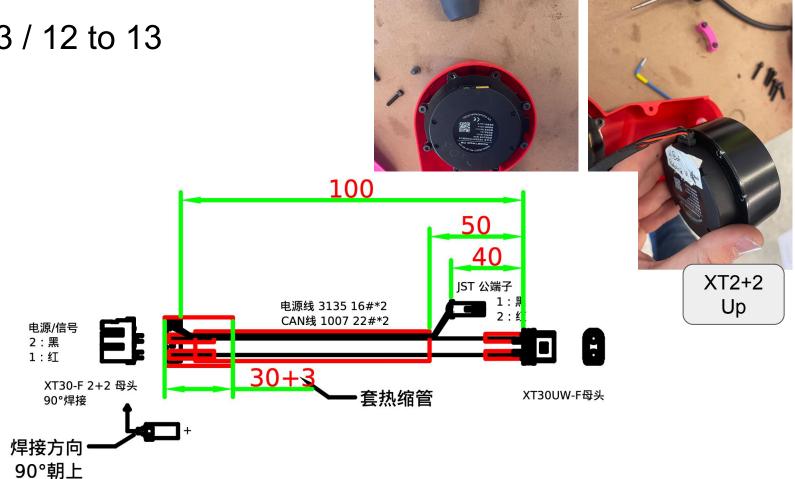


23 to 24 / 13 to 14






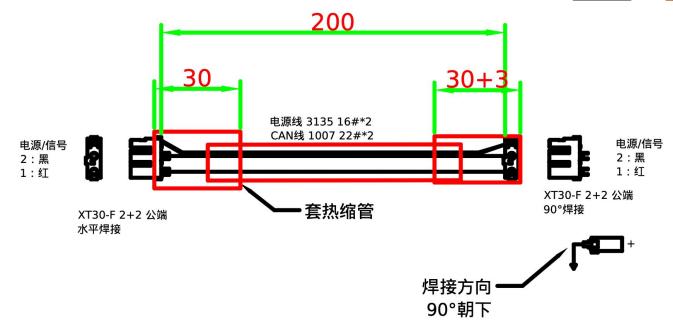

24 to 25 / 14 to 15

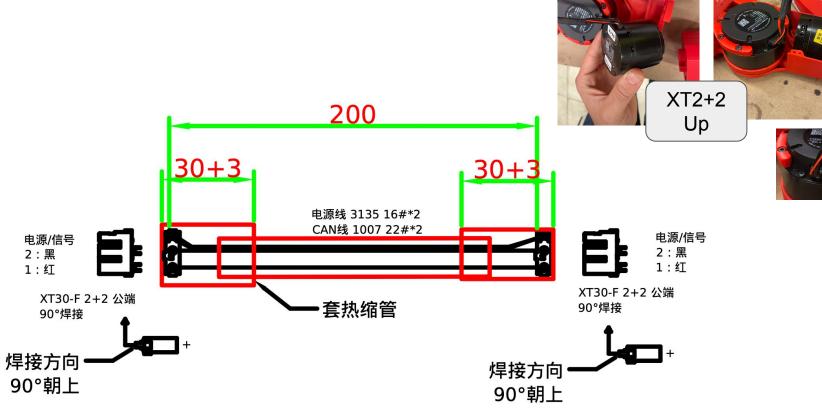


25 / 15 to 4-pin hand plug

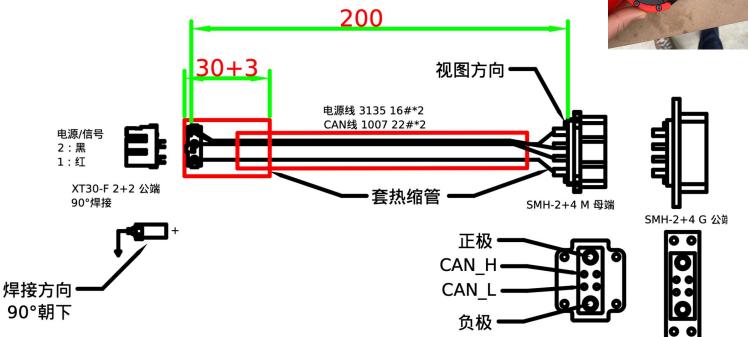



Legs 腿


Power Board to 41 / 31

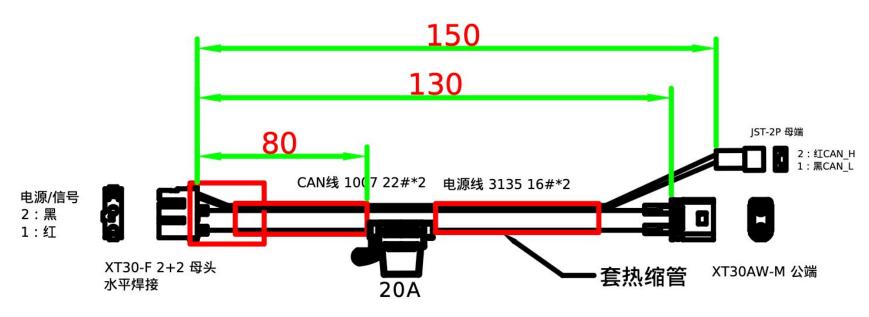

Add a thicker 8mm diameter section for friction strain relief


42 to 43 / 32 to 33



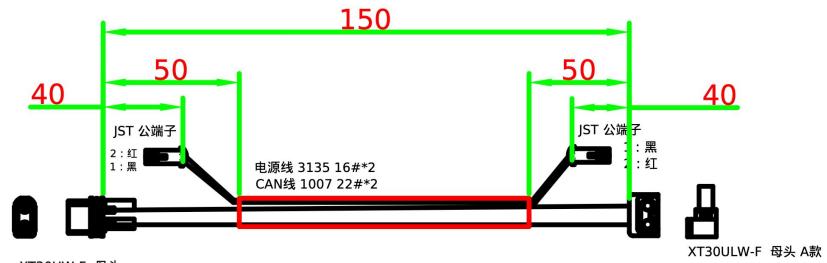

XT30UW-F 母头

43 to 44 / 33 to 34

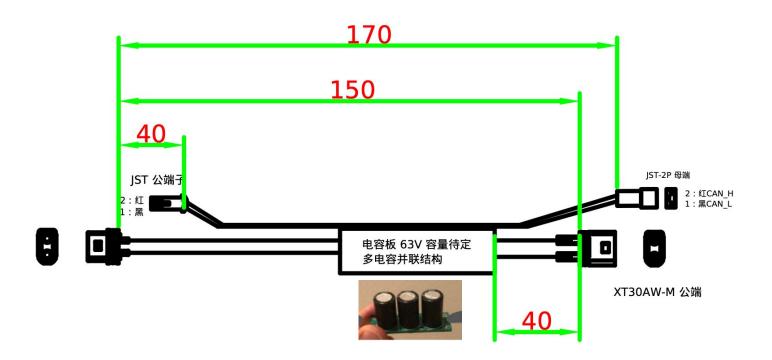


44 to 45 / 34 to 35








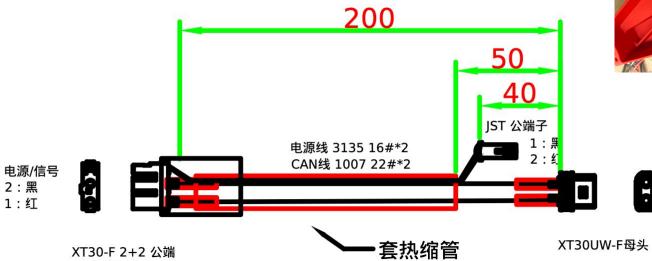

水平焊接

Battery to Power Board

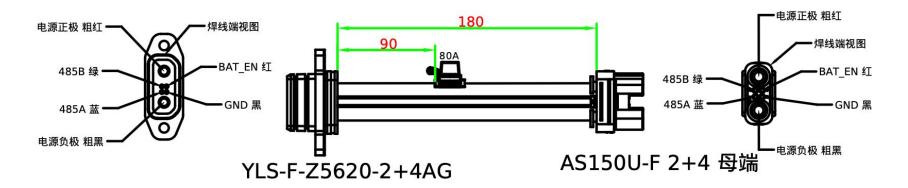

线材要求:

电源线:3135 10号硅胶线,红正,黑负

信号线:24号线材,

红:BAT_EN,黑:GND,蓝:485A,绿:485B

Wire Sleeving Requirement 线束编织套管要求

低摩擦的线 Low Friction, like the one on the right 但也要下高度6mm Slim, 6mm diameter max all included

